
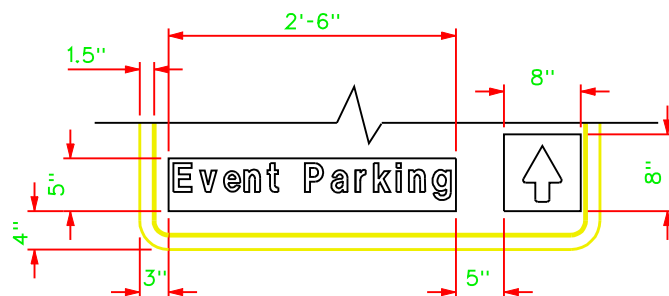
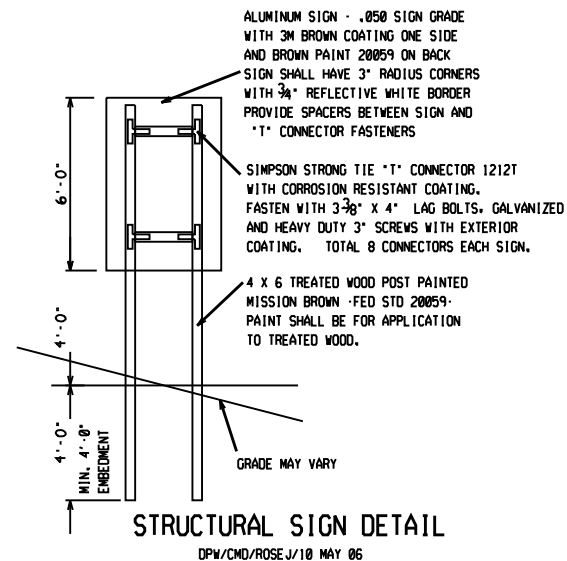
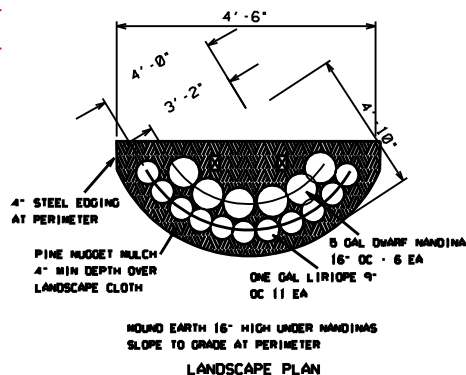


3.1 SIGN DETAIL


SCALE 2" = 1' - 0"

NOTES:

1. THE 4" X 8" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 16" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NCMTCD DRAWING 803.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL, EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.




PROVIDE TWO (0.050 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.



SIDE VIEW

DIRECTORATE OF PUBLIC WORKS FORT BRAGG, NORTH CAROLINA	
FORT BRAGG DIRECTIONAL SIGNS	
FORT BRAGG NORTH CAROLINA	
DATE SIGN DETAILS	DRAWN BY 11 MAY 08
SCALE SHOWN PW- 6880	DATE 11 MAY 08
SHEET 7 OF 7	

CAD FILE NAME AND OR NUMBER

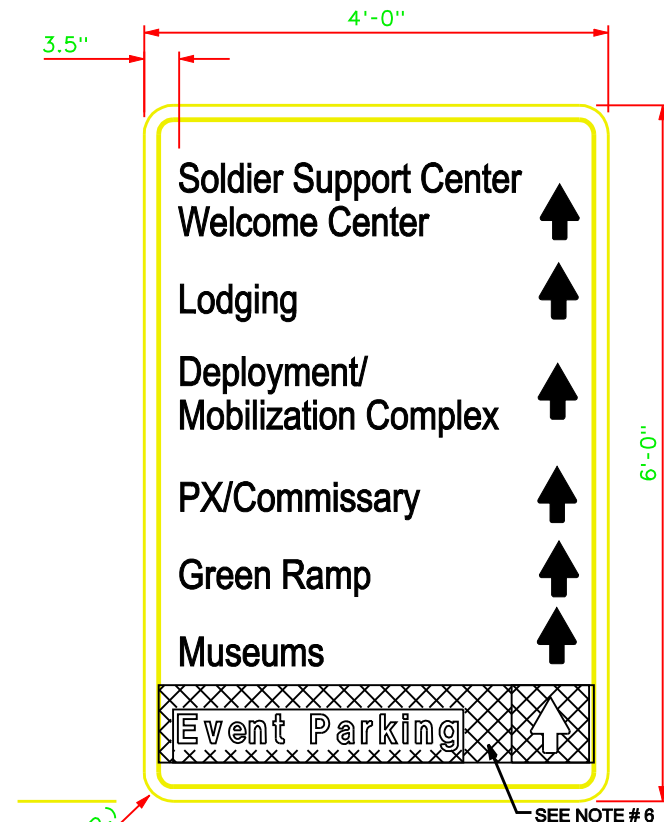


3.2 SIGN DETAIL


SCALE 2" = 1' - 0"

NOTES:


1. THE 4" X 6" WOOD POST SHALL BE DRILLED TO MAKE THEM FRANGIBLE (WITH 1 1/2" HOLES, PERPENDICULAR TO THE DIRECTION OF TRAVEL, LOCATED 4" AND 16" ABOVE THE GROUND) THE DRILL HOLES IN THE CENTER OF THE SUPPORTS. REFER TO NC MUTCD DRAWING 903.20.
2. USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, UNLESS OTHERWISE INDICATED IN THESE PLANS.
3. USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO A.S.T.M. A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH A.S.T.M. A-153.
4. ALL SIGNS WILL BE M3 BROWN WITH REFLECTIVE WHITE LETTERING AS INDICATED IN DETAIL. EXCEPT AS INDICATED FOR INSERTS AND INSERT AREA.
5. ALL SIGNS WILL BE PROVIDED WITH AN INSERT AREA FOR SPECIAL EVENTS CONSISTING OF ONE "EVENT PARKING" WINDOW CUT (SEE DETAIL) AND ONE WINDOW CUT FOR AN ARROW.
6. THE "EVENT PARKING" INSERT AREA WILL BE PAINTED WITH REFLECTIVE WHITE AND THE LETTERS ON THE INSERTS WILL BE M3 BROWN (SEE DETAIL).
7. THE "EVENT PARKING" INSERTS BACK AREA WILL BE PAINTED WITH REFLECTIVE WHITE TO BE USED DURING NORMAL OPERATIONS TO COVER INSERT OPENINGS.




ARROW DETAIL
NTS

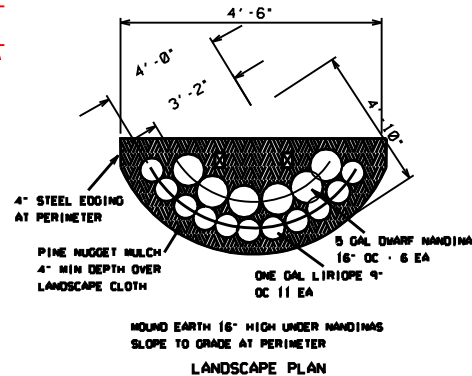


LANDSCAPE PLAN

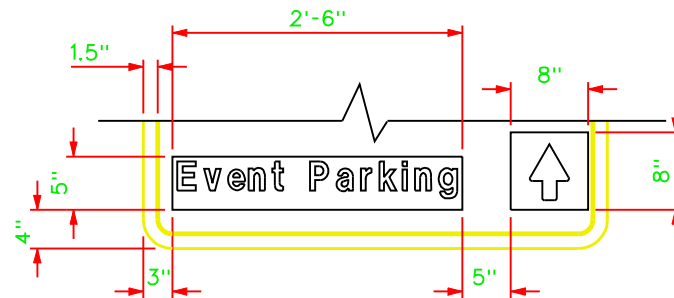

SIGN INSERT DETAIL
NTS

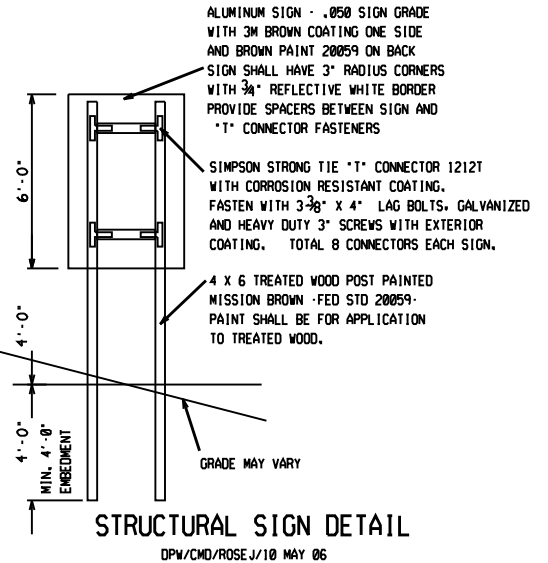

PROVIDE TWO (0.0850 ALUM. INSTALLED WITH ALUM. POP RIVETS) BACK BRACKETS TO HOLD EACH SIGN INSERTS ACCORDING TO INSERT DIMENSIONS.



SIDE VIEW

DIRECTORATE OF PUBLIC WORKS
FORT BRAGG, NORTH CAROLINA

FORT BRAGG
DIRECTIONAL SIGNS

FORT BRAGG NORTH CAROLINA

DATE: 11 MAY 06

BY: J. T. OSBORN, CIVIL ENGINEER

PROJECT: 6660

SHEET: 7 OF 7

END FILE NAME AND OF NUMBER

